

EXTERIOR DOOR REFINISHING AND MAINTENANCE

1. Things You Will Need

- Micro-Fiber Cloth
- Crystal Clear Enamel or Similar
- Fine or Ultra Fine Sanding Sponge




2. Prepping

Remove PVC finish layer and all hardware from your door.



3. Prepping Hardware

If rusted, take your sanding sponge and sand it down in the grain direction to avoid scratches.

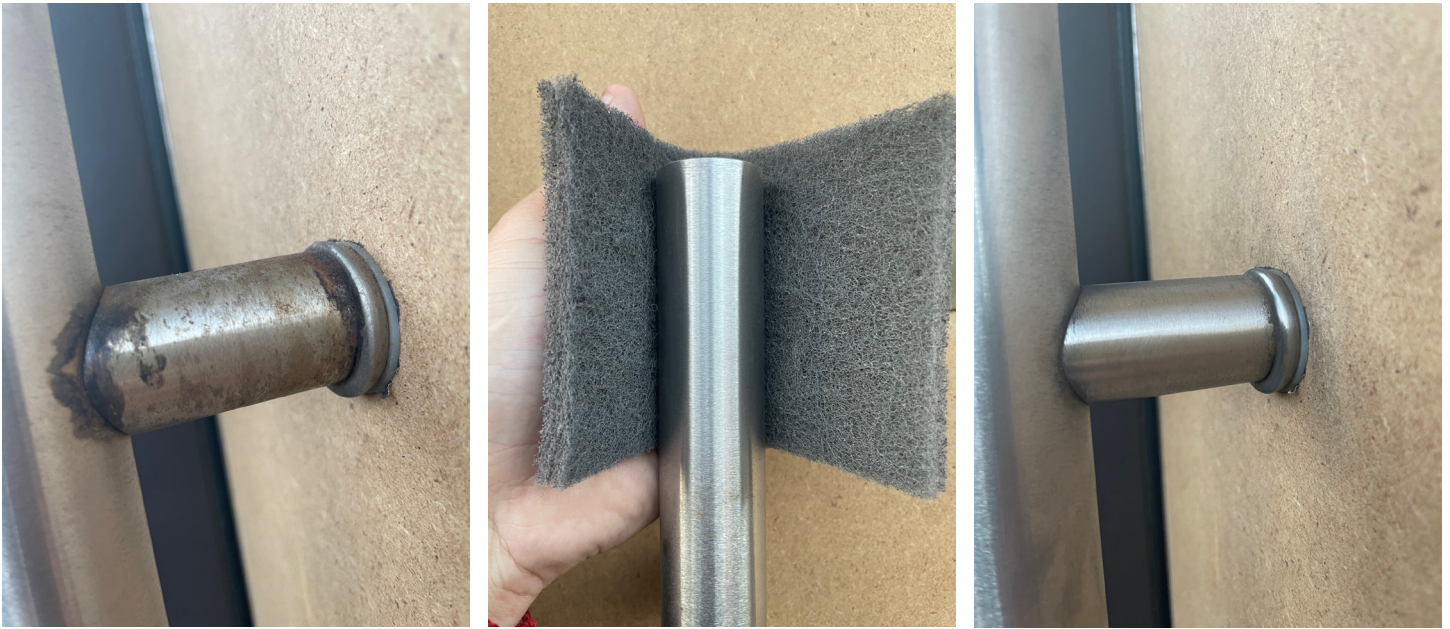

4. Masking and Sanding

Prep and mask the surroundings before priming and painting. Patch all uneven surfaces on the door. Sand down the door to smooth finish before priming. Clean all dust before priming or painting.



5. Priming

Apply first coat of primer, wait at least 1 hour to dry and apply second coat of primer, wait at least 2 hours before applying paint.



6. Painting

Wipe down the door to remove any imperfections and apply first coat of paint. Wait till the paint is dry and apply second coat of paint.



7. Finishing

Remove all masking materials after second coat of paint is fully dried and reinstall all hardware. Apply touchups if needed.

